

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International publication date

20 January 2005 (20.01.2005)

PCT

(10) International publication number

WO 2005/005183 A1

(51) International patent classification<sup>7</sup>:

B60H 1/00

(72) Inventors; and

(21) International application number: PCT/EP2004/006437

(75) Inventors/Applicants (US only): BOUCHALAT, Karim-Mathieu [FR/DE]; Rossbergstrasse 37, 70188 Stuttgart (DE). DIGELE, Jörg [DE/DE]; Bussardweg 19, 71691 Freiberg (DE). SCHWEIZER, Gebhard [DE/DE]; Arndtstrasse 4, 71229 Leonberg (DE). SCHENKEWITZ, Werner [DE/DE]; Paul-Lincke-Strasse 20, 70195 Stuttgart (DE).

(22) International filing date: 15 June 2004 (15.06.2004)

(25) Language of filing: German

(26) Language of publication: German

(74) Joint Representative: BEHR GmbH & CO. KG; Intellectual Property, G-IP, Mauserstrasse 3, 70469 Stuttgart (DE).

(30) Data relating to the priority:

103 31 123.8 9 July 2003 (09.07.2003) DE

10 2004 007 511.5 13 February 2004 (13.02.2004) DE

(71) Applicant (for all designated States except US): BEHR GMBH & CO. KG [DE/DE]; Mauserstrasse 3, 70469 Stuttgart (DE).


(81) Designated states (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU,

[continued on next page]

As printed

(54) Title: ASSEMBLY ARRAY FOR AN AIR CONDITIONER WITH A HEATING DEVICE

(54) Bezeichnung: EINBAUANORDNUNG FÜR EINE KLIMAAANLAGE MIT HEIZEINRICHTUNG

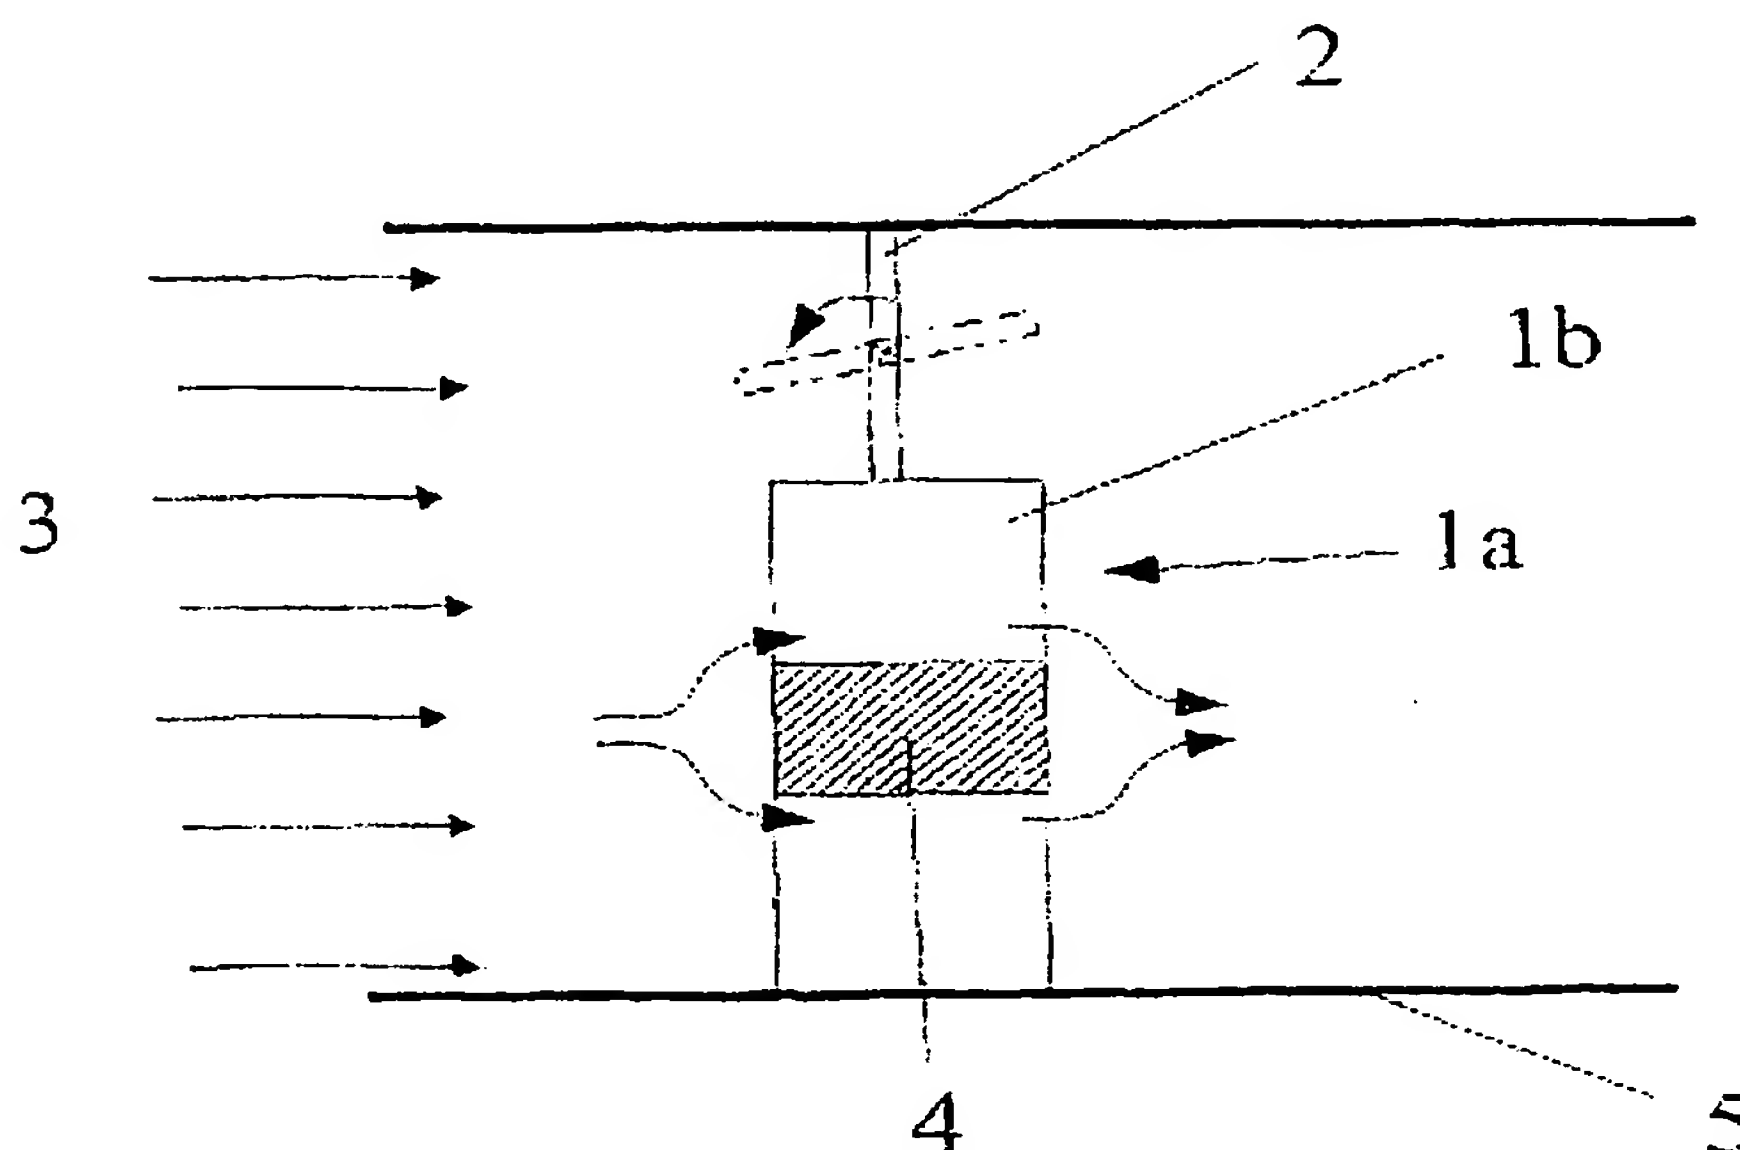

(57) Abstract: The invention relates to an assembly array for an air conditioner with a heating device, particularly for motor vehicles, comprising at least one housing in which air is guided in an at least partly predetermined flow path. The flow path also receives at least one heating device and at least one control device, wherein the heating device is arranged in a first flow path and the control device is partly arranged in a second flow path. The control device is arranged relative to the heating device in such a way that it provokes almost completely the through-flow of the heating device.

[continued on next page]

ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated states (unless otherwise indicated, for every kind of regional protection available): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17**

– of inventorship (Rule 4.17(iv)) for the following designation US

**Published:**

– With International Search Report.  
– before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For an explanation of the two-letter codes and the other abbreviations, reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT Gazette.

(57) Zusammenfassung: Die Erfindung betrifft eine Einbauanordnung für eine Klimaanlage mit Heizeinrichtung, insbesondere für Kraftfahrzeuge, mit wenigstens einem Gehäuse, in welchem Luft in einem wenigstens teilweise vorgegebenen Strömungsweg geführt wird. Ferner nimmt der Strömungsweg wenigstens eine Heizeinrichtung und wenigstens eine Stelleinrichtung auf, wobei die Heizeinrichtung in einem ersten Strömungsweg und die Stelleinrichtung wenigstens teilweise in einem zweiten Strömungsweg angeordnet ist. Die Stelleinrichtung ist ferner in bezug auf die Heizeinrichtung so angeordnet, dass sie wenigstens in einer Stellung die Durchströmung der Heizeinrichtung weitgehend vollständig bewirkt.